



ABBERLY™


It was a time of speakeasies and flappers.
And what we now call Art Deco was everywhere.
Novalis rediscovers its sublime elegance and
geometric boldness in the classic patterns and
style of this bygone era. Now matched with
concrete-look tiles and wood style plank accents
for a fresh, contemporary statement we call
Abberly™.







Shown: Abberly™ Ornamental Décor-Jazz
and Concrete-Prohibition Tile

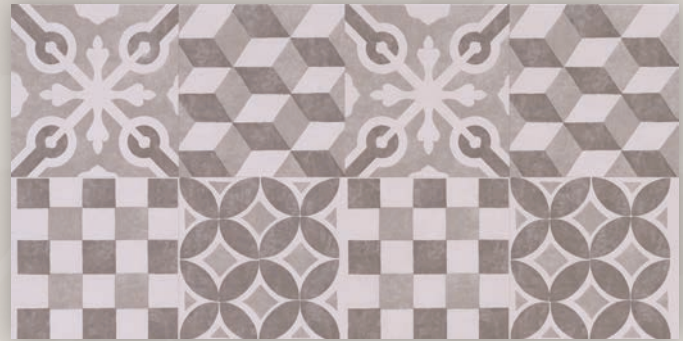

Abberly™ luxury vinyl flooring may be reminiscent of a carefree, jazzy period, but not its engineering. Designed for the demands of Main Street, Abberly is right at home in restaurant or retail settings, providing all the performance and ease of maintenance you could ever imagine. Make your space the talk of the town ... with a touch of Abberly.



THE NOVAFLOOR® ABBERLY™ MAIN STREET LVF COLLECTION

18" x 36" Ornamental Tiles



NAT601/NAT601-C
ORNAMENTAL DECOR-JAZZ (V4)



NAT602/NAT602-C
ORNAMENTAL DECOR-SPEAKEASY (V4)

18" x 36" Tiles



NAT603/NAT603-C
CONCRETE-PROHIBITION (V2)



NAT604/NAT604-C
CONCRETE-SLAMMER (V2)



NAT605/NAT605-C
CONCRETE-METROPOLIS (V2)



NAT606/NAT606-C
CONCRETE-CAPONE (V2)

9" x 48" Planks



NAP701/NAP701-C
REFINED OAK-GATSBY (V1)



NAP702/NAP702-C
REFINED OAK-DAPPER (V2)



NAP703/NAP703-C
REFINED OAK-BEARCAT (V2)



NAP704/NAP704-C
REFINED OAK-SALOON (V2)



NAP705/NAP705-C
AGED WOOD-BREW (V2)



NAP706/NAP706-C
ORNAMENTAL DECOR-SUPPER CLUB (V4)

Specifications	Abberly™	Abberly™ Clic	Technical Specifications	Abberly™	Abberly™ Clic
Overall Thickness	2.5	5.0	ASTM F1700-13 Solid Vinyl Floor Tile	Class III, Type B	Class III, Type B
Wearlayer Thickness	0.5mm (20 mil)	0.5mm (20 mil)	ASTM F137-08 Flexibility	Passes	Passes
Tile Size	18" x 36"	17.74" x 35.74"	ASTM F386-11 Thickness	Passes	Passes
Plank Size	9" x 48"	8.74" x 47.74"	ASTM F410- Wear Layer Thickness	Passes	Passes
Urethane	Y	Y	ASTM F925 Stain and Chemical resistance (5 minute & 24 hour)	Passes	Passes
Edge and Grout Effect	MBV	MBV	ASTM F1514 Heat Stability	Passes	Passes
Floor Score	Yes	Yes	ASTM F1515 Light Stability	Passes	Passes
Residential Warranty	Lifetime Limited	Lifetime Limited	ASTM F1914 Immediate & Residual Indentation	Passes	Passes
Heavy Commercial Warranty	10-Year	10-Year	ASTM 2055 Size and Squareness	Passes	Passes
Tile Packaging	10 pcs. (45 sq. ft.)	4 pcs. (17.612 sq. ft.)	ASTM F2199-09 Dimensional Stability	Passes	Passes
Plank Packaging	12 pcs. (36 sq. ft.)	8 pcs. (28.18 sq. ft.)	ASTM D2047 Static COF for Polished Surfaces	Exceeds Industry Standards	Exceeds Industry Standards
Tile Cartons/Pallet	44	54	ASTM E648-06 Critical Radiant Flux	Class 1	Class 1
Plank Cartons/Pallet	56	40	ASTM E662 Smoke Density	Passes	Passes
Tile Weight/Carton	40.56	33.75	ASTM F970-07 Static load limit (modified)	0.001" @ 250 lbs.	0.001" @ 250 lbs.
Plank Weight/Cartons	32.63	44.15	Static Load Limit	>1,200 lbs.	>1,200 lbs.

ABBERLY™ IS MADE TO THE HIGHEST ENVIRONMENTAL STANDARDS BY NOVALIS



Declare.



GreenStep



NOVA
FLOOR
by **NOVALIS** INNOVATIVE FLOORING



Visit us at NovaFloor.us or call 866-NOVALIS

Information in this catalog is subject to change without notice. Color accuracy may vary due to printing. © Novalis 2016

