

Novalis S300 Resilient Formula Aerosol Spray Adhesive is a water-based aerosol adhesive recommended for installations of resilient floor coverings. It is particularly convenient since it can be used in occupied buildings and greatly reduces the handling and application requirements associated with conventional adhesives. Novalis S300 Spray Adhesive demonstrates highly aggressive grab and shear strength, and has outstanding water and plasticizer resistance.

S300 utilizes a new point and press delivery tip which significantly reduces overspray, leaving a more accurate spray pattern. S300 is great for all size jobs including repairs.

Novalis S300 Aerosol Adhesive may contribute to the following LEED[®] Credits:

- IEQ Credit 4.1—Low Emitting Materials
- IEQ Credit 4.3—Low VOC ratings
- MR Credit 5—Regional Materials (jobsites within 500 miles of Dalton, GA)

This product is not photochemically reactive as defined by California Rules 102 and 443. VOC content is below that established by California SCAQMD Rule 1168.



Features....

- ▽ Non-flammable
- ▽ Low odor; Zero calculated VOC
- ▽ No solvents or hazardous chemicals
- ▽ Contributes to LEED credits
- ▽ CRI Green Label Plus approved
- ▽ Outstanding water resistance when dry
- ▽ Up to 200 feet² per 22 ounce can
- ▽ Meets guidelines set by California SCAQMD Rule 1168 and Section 01350
- ▽ Use up to 93% RH (ASTM 2170) and 11.0 pH

See Novalis Technical Data Sheet for full installation and specification information before installing flooring with E510 adhesive.


Novalis S300 Resilient Formula Aerosol Spray Adhesive is a water-based aerosol adhesive recommended for installations of resilient floor coverings. It is particularly convenient since it can be used in occupied buildings and greatly reduces the handling and application requirements associated with conventional adhesives. Novalis S300 Spray Adhesive demonstrates highly aggressive grab and shear strength, and has outstanding water and plasticizer resistance.

S300 utilizes a new point and press delivery tip which significantly reduces overspray, leaving a more accurate spray pattern. S300 is great for all size jobs including repairs.

Novalis S300 Aerosol Adhesive may contribute to the following LEED[®] Credits:

- IEQ Credit 4.1—Low Emitting Materials
- IEQ Credit 4.3—Low VOC ratings
- MR Credit 5—Regional Materials (jobsites within 500 miles of Dalton, GA)

This product is not photochemically reactive as defined by California Rules 102 and 443. VOC content is below that established by California SCAQMD Rule 1168.

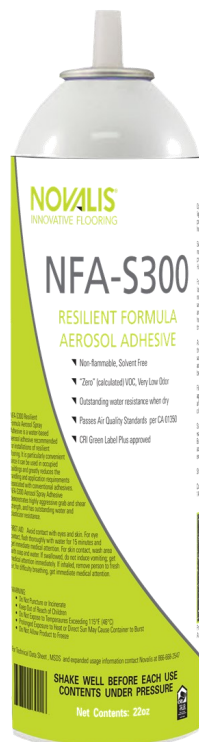

Features....

- ▽ Non-flammable
- ▽ Low odor; Zero calculated VOC
- ▽ No solvents or hazardous chemicals
- ▽ Contributes to LEED credits
- ▽ CRI Green Label Plus approved
- ▽ Outstanding water resistance when dry
- ▽ Up to 200 feet² per 22 ounce can
- ▽ Meets guidelines set by California SCAQMD Rule 1168 and Section 01350
- ▽ Use up to 93% RH (ASTM 2170) and 11.0 pH

See Novalis Technical Data Sheet for full installation and specification information before installing flooring with E510 adhesive.