

**PRODUCT SPECIFICATIONS**

7" x 48" Planks Glue down installation



Refined Walnut-Chelsea (V4)

NDP901



Refined Walnut-Waverly (V4)

NDP902



Refined Walnut-Ellis (V4)

NDP903



Refined Walnut-Bowery (V4)

NDP904



Refined Walnut-Gramercy (V4)

NDP905



Refined Walnut-Clinton (V4)

NDP906



European White Oak-Mercer (V2)

NDP907




European White Oak-Lorimer (V2)

NDP908



European White Oak-Sullivan (V2)

NDP909



European White Oak-Varick (V2)

NDP910

12" x 24" Tiles Available as groutable glue down



Distressed Concrete-Hudson (V2)  
NDT801



Distressed Concrete-Houston (V2)  
NDT802



Distressed Concrete-Delancy (V2)  
NDT803



Distressed Concrete-Lex (V2)  
NDT804

6" x 24" Tiles Glue down installation



Petrified Concrete-Astor (V3)

NDT805



Petrified Concrete-Fulton (V3)

NDT806



Petrified Concrete-Nolita (V3)

NDT807



Petrified Concrete-Wythe (V3)


NDT808

**PRODUCT SPECIFICATIONS**

Specifications	Glue Down
Overall Thickness	2.5mm
Wear Layer Thickness	0.5mm (20 mil)
Tile Size	12" x 24"
Tile Size	6" x 24"
Plank Size	7" x 48"
Urethane Protective Coating	Yes
Edge and Grout Effect	MBV
FloorScore®	Yes
Residential Warranty	Limited Lifetime
Heavy Commercial Warranty	10-Year
Tile Packaging (12" x 24")	18 pcs. (36 sq. ft.)
Tile Packaging (6" x 24")	32 pcs. (32 sq. ft.)
Plank Packaging (7" x 48")	15 pcs. (35 sq. ft.)
Tile Cartons/Pallet (12" x 24")	54
Tile Cartons/Pallet (6" x 24")	60
Plank Cartons/Pallet (7" x 48")	55
Tile Weight/Carton (12" x 24")	32.63
Tile Weight/Carton (6" x 24")	29.10
Plank Weight/Cartons (7" x 48")	31.75

Specifications	Glue Down
ASTM F1700-13	Solid Vinyl Floor Tile
ASTM F137-08	Flexibility
ASTM F386-11	Thickness
ASTM F410	Wear Layer Thickness
ASTM F925	Stain and Chemical Resistance (5 minute & 24 hour)
ASTM F1514	Heat Stability
ASTM F1515	Light Stability
ASTM F1914	Immediate & Residual Indentation
ASTM F2055	Size and Squareness
ASTM F2199-09	Dimensional Stability
ASTM E648-06	Critical Radiant Flux
ASTM E662	Smoke Density
ASTM F970-07	Static Load Limit
Static Load Limit (Modified)	

Class III, Type B
Passes
Passes
Passes
Passes
Passes
Passes
Passes
Passes
Class 1
Passes
0.001" @ 250 psi
>1,200 psi

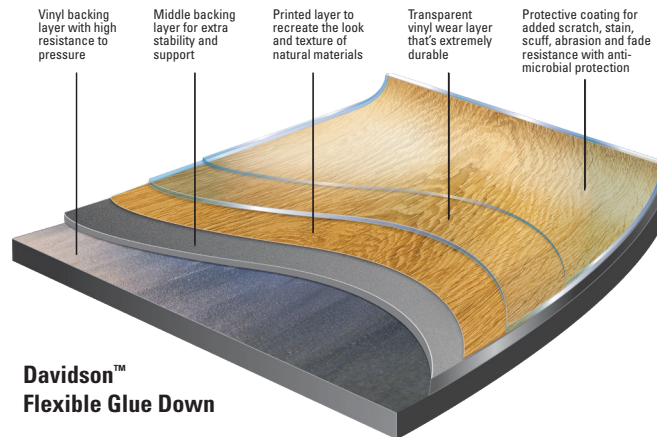

Made with the highest standards



Declare.



Health Product DECLARATION

